



KV 9224



- with FIXCONNECT® N- und PE terminal
- for installation of units up to $I_n = 63$ A for mounting on DIN rail, top hat profile 35 mm
- with 2x 12 modules (18 mm)

ELECTRICAL PROPERTIES

Rated voltage: $U_n = 400$ V

Rated insulation voltage:

Rated insulation voltage	Voltage type
$U_i = 690$ V	a.c.

Protection class: II

Rated current (of the terminal): $I_n = 75$ A

Number of possible N-potentials: 4

Power dissipation capability:

power dissipation capability Pde	Temperature difference
31 W	30 K

Power dissipation capability:

power dissipation capability Pde	Temperature difference
31 W	30 K

N separable: No
Permissible power dissipation according to DIN 43871: 25 W for 30 K

power dissipation capability according to DIN EN 60670-24:

power dissipation capability Pde	Temperature difference
31 W	30 K

CONNECTION DATA

Number of clamping units per pole:

Number of clamping units per pole	Connection type
24	Plug-in terminal connection
6	Screw connection

Connection cross-section plug-in terminals:

Maximum number of conductors clamping units each	Conductor cross-section min.	Conductor cross-section max.	Conductor cross section	Conductor type	Conductor material
1	1.5 mm ²	4 mm ²	solid, flexible	round	Cu

Connection cross-section screw terminals:

Maximum number of conductors clamping units each	Conductor cross-section min.	Conductor cross-section max.	Conductor cross section	Conductor type	Conductor material
1	16 mm ²	25 mm ²	stranded	round	Cu
4	1.5 mm ²	2.5 mm ²	solid	round	Cu
3	4 mm ²	6 mm ²	solid	round	Cu
1	10 mm ²	10 mm ²	solid	round	Cu
1	1.5 mm ²	25 mm ²	flexible	round	Cu

CABLE ENTRIES

Cable entries:

Number of cable entries	Type of cable entry	Sealing range of the cable entry	Location of cable entry
8	elastic membranes	7 mm - 12 mm	wall top+bottom
8	elastic membranes	7 mm - 14 mm	wall top+bottom
4	elastic membranes	12 mm - 20 mm	wall top+bottom
1	elastic membranes	16.5 mm - 29 mm	wall top+bottom

MECHANICAL PROPERTIES

Type of cover:	Door
Transparent cover:	Yes
Width in modules:	12 modules
Number of rows:	2
Delivered accessories:	Sealing plug, DIN rail(s), blanking strips, labelling strips, cable entry cover
IP degree of protection:	IP65
DIN rail spacing:	125 mm
Cover cutouts:	Open

AMBIENT CONDITIONS

During installation, the climatic effects on the installed equipment must be taken into account, for example high and low ambient temperatures and solar radiation. To reduce the formation of condensed water, see technical information: Formation of condensed water and retaliatory actions.

Application area:	Indoor installation
Maximum ambient temperature 24 h:	35 °C

Ambient temperature: -5 °C up to +40 °C
Relative humidity: ≤ 50 % at 40 °C, ≤ 100 % at 25 °C

MATERIAL PROPERTIES

Material: Polystyrene
Glow wire test according to IEC 60695-2-11: 750 °C
UL 94: V-2
Temperature resistance: -25 °C up to +80 °C
Halogen-free: Yes
Silicone-free: Yes

DIMENSIONS

Height: 458 mm
Width: 295 mm
Depth: 129 mm
Net weight: 2.695 kg

COLOURS

Colour: Grey, similar to RAL 7035

CERTIFICATES

conforming to the standards: EN 60670-1, DIN EN 60670-24

SALES DATA

Product number: 6100002
EAN: 4012591620020
Pack unit: 1
Customs tariff number: 85381000
ETIM class: DYNAMIC: EC000214 - Small distribution board
ETIM-8.0: EC000214 - Small distribution board
ETIM-7.0: EC000214 - Small distribution board
ETIM-6.0: EC000214 - Small distribution board
ETIM-5.0: EC000214 - Small distribution board
ETIM-4.0: EC000214 - Small distribution board

NOTE


When using the sealing plugs supplied, the specified protection class is not changed,


TENDER TEXT

Tender text:

Small-type distribution board according to EN 60670-24, DIN 43871 and IEC 61439 -3, for the installation of DIN rail equipment up to 63 A according to DIN 43880, total insulated (protection class II). FIXCONNECT terminal technology for PE and N from 1.5 mm² to 4 mm² for solid and flexible copper conductors as well as a terminal from 1.5 mm² to 25 mm² with conductor protection and protection against self-loosening for solid, stranded and flexible copper conductors. Suitable for indoor installations - normal environment and/or protected outdoor installation - according to DIN VDE 0100, part 737. For ambient temperatures of maximum + 40°C and minimum - 5°C, relative humidity 50% at 40°C or 100% at 25°C, material temperature resistance from - 25°C to 70°C, burning behaviour according to IEC 60695-2-1, glow wire test 750°C, UL Subject 94 V-2. Rated voltage: AC 400 V, rated current of the N-bar: I= 75 A, material: thermoplastic, halogen and silicon-free, colour: grey, RAL 7035, with transparent door for all DIN rails, Make: HENSEL KV, Degree of protection: IP 65 with integrated elastic membranes. 24 modules each 18 mm. Dimensions H x W x D 458 x 295 x 129 mm.

DRAWINGS

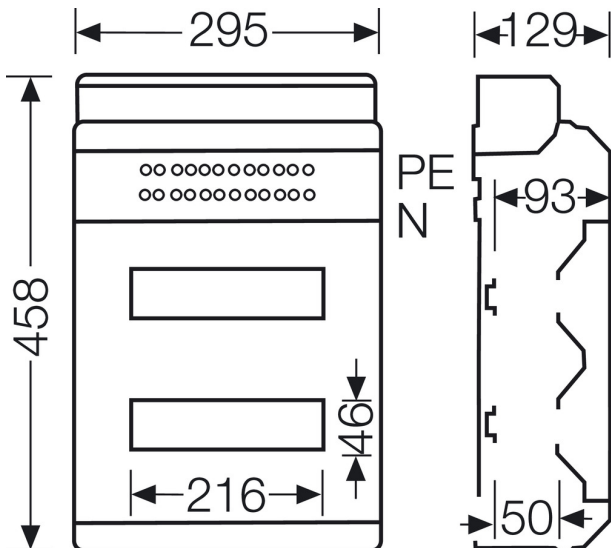

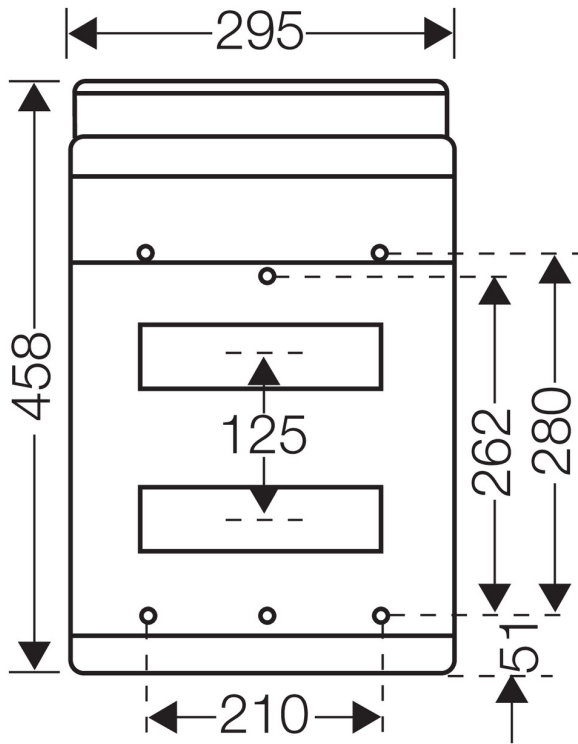

8xØ7-12 mm

8xØ7-14 mm

4xØ12-20 mm
 1xØ16,5-29 mm

8xØ7-12 mm

8xØ7-14 mm

4xØ12-20 mm

1xØ16,5-29 mm